


# FROV/A316 - Clapet valve with A316 spring DN 32:400

Clapet valve in PVC-U with A316 spring, ISO-DIN series.

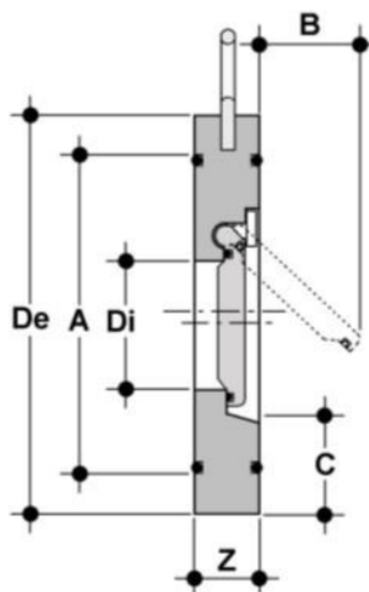

## EPDM

Reference	d	DN	PN	ISO/DIN	Z	Di	A	B	C	g
FROV040EMLX	40	32	10	85	15	18	59	22	25	120
FROV050EMLX	50	40	10	95	16	22	72	25	28	160
FROV063EMLX	63	50	10	109	18	32	86	37	29	260
FROV075EMLX	75	65	10	129	20	40	105	50	31	330
FROV090EMLX	90	80	10	144	20	54	119	61	32	400
FROV110EMLX	110	100	10	164	23	70	146	77	31	560
FROV140EMLX	140	125	10	195	23	92	173	94	35	760
FROV160EMLX	160	150	6	220	26	105	197	100	40	1120
FROV225EMLX	225	200	6	275	34	154	255	152	38	2130
FROV280EMLX	280	250	5	330	40	192	312	180	41	3540
FROV315EMLX	315	300	5	380	45	227	363	215	41	5350
FROV355EMLX	350	350	5	440	49	266	416	245	44	7855
FROV400EMLX	400	400	5	491	65	310	467	285	50	12975

## FKM

Reference	d	DN	PN	ISO/DIN	Z	Di	A	B	C	g
FROV040FMLX	40	32	10	85	15	18	59	22	25	120



# FROV/A316 - Clapet valve with A316 spring DN 32:400

Reference	d	DN	PN	ISO/DIN	Z	Di	A	B	C	g
FROV050FMLX	50	40	10	95	16	22	72	25	28	160
FROV063FMLX	63	50	10	109	18	32	86	37	29	260
FROV075FMLX	75	65	10	129	20	40	105	50	31	330
FROV090FMLX	90	80	10	144	20	54	119	61	32	400
FROV110FMLX	110	100	10	164	23	70	146	77	31	560
FROV140FMLX	140	125	10	195	23	92	173	94	35	760
FROV160FMLX	160	150	6	220	26	105	197	100	40	1120
FROV225FMLX	225	200	6	275	34	154	255	152	38	2130
FROV280FMLX	280	250	5	330	40	192	312	180	41	3540
FROV315FMLX	315	300	5	380	45	227	363	215	41	5350
FROV355FMLX	350	350	5	440	49	266	416	245	44	7855
FROV400FMLX	400	400	5	491	65	310	467	285	50	12975



# FROV/A316 - Clapet valve with A316 spring DN 32:400

- Installed with FIP QPV (d50 - d160) stubs and QRV stubs using flat gasket QHV/Y (d225 - d315), on PVC piping class PN10 or lower with type ODV flanges
- **Metal support for easy and precise centring** of the valve during installation
- Can be installed in either a vertical or horizontal position
- **Sealing system with O-ring** for optimum sealing and installation without flat gaskets