


# S22FV - 24V DC - true union 2-way solenoid valve

2 way solenoid valve with BSP threaded female union ends.

Function: Normally closed. Power supply: 24V DC

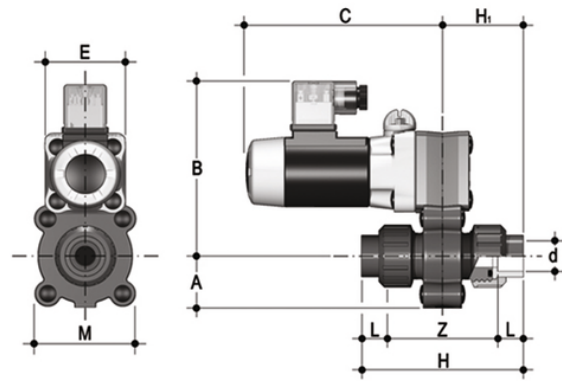

## EPDM

| Reference      | d    | DN | A  | B   | C   | H   | H <sub>1</sub> | L    | Z  | E  | M  | g    |
|----------------|------|----|----|-----|-----|-----|----------------|------|----|----|----|------|
| S22FV0838E024C | 3/8" | 8  | 34 | 115 | 130 | 97  | 48,5           | 11,5 | 74 | 54 | 67 | 1000 |
| S22FV0812E024C | 1/2" | 8  | 34 | 115 | 130 | 105 | 52,5           | 15   | 75 | 54 | 67 | 1000 |
| S22FV1038E024C | 3/8" | 10 | 34 | 115 | 130 | 97  | 48,5           | 11,5 | 74 | 54 | 67 | 1000 |
| S22FV1012E024C | 1/2" | 10 | 34 | 115 | 130 | 105 | 52,5           | 15   | 75 | 54 | 67 | 1000 |
| S22FV1538E024C | 3/8" | 15 | 34 | 115 | 130 | 97  | 48,5           | 11,5 | 74 | 54 | 67 | 1000 |
| S22FV1512E024C | 1/2" | 15 | 34 | 115 | 130 | 105 | 52,5           | 15   | 75 | 54 | 67 | 1000 |

## S22FV - 24V DC - true union 2-way solenoid valve

| Reference      | d    | DN | A  | B   | C   | H   | H <sub>1</sub> | L    | Z  | E  | M  | g    |
|----------------|------|----|----|-----|-----|-----|----------------|------|----|----|----|------|
| S22FV0838F024C | 3/8" | 8  | 34 | 115 | 130 | 97  | 48,5           | 11,5 | 74 | 54 | 67 | 1000 |
| S22FV0812F024C | 1/2" | 8  | 34 | 115 | 130 | 105 | 52,5           | 15   | 75 | 54 | 67 | 1000 |
| S22FV1038F024C | 3/8" | 10 | 34 | 115 | 130 | 97  | 48,5           | 11,5 | 74 | 54 | 67 | 1000 |
| S22FV1012F024C | 1/2" | 10 | 34 | 115 | 130 | 105 | 52,5           | 15   | 75 | 54 | 67 | 1000 |
| S22FV1538F024C | 3/8" | 15 | 34 | 115 | 130 | 97  | 48,5           | 11,5 | 74 | 54 | 67 | 1000 |
| S22FV1512F024C | 1/2" | 15 | 34 | 115 | 130 | 105 | 52,5           | 15   | 75 | 54 | 67 | 1000 |

## S22FV – 24V DC – true union 2-way solenoid valve

- Installation flexibility and ease of maintenance: high-performance solenoid electric actuator with internal moving parts designed to exceed 5 million maintenance free operating cycles. Adjustable circular section coil with IP65 protection class.
  - DIN 43650 electrical connector supplied as standard: includes LED indicator light and rectifier (in the case of an AC coil).
  - Lever shutter in EPDM or FKM and lever in stainless steel.
  - Suitable for use with aggressive fluids: no metal component in contact with the fluid or the external environment; all the screws are covered by PE protection plugs.
  - Emergency override
- 
- 2-Way PVC-U body
  - Installation flexibility and ease of maintenance: high-performance solenoid electric actuator designed to exceed 5 million maintenance-free operating cycles
  - Adjustable circular section coil with IP65 protection class.
  - Integrated override with the possibility of being installed in 3 different positions.
  - Lever shutter in EPDM or FKM and lever in stainless steel.
  - DIN 43650 electrical connector supplied as standard: includes LED indicator light and rectifier (in the case of an AC coil).