


Q/BBE-C - Union end

Union end, short spigot, for butt welding SDR 11 - S5.



Reference	d	Z	h	d ₃	d ₄	S	g
QBBEC11020	20	55	5	27,4	30	1,9	12
QBBEC11025	25	55	6	35,9	38,5	2,3	20
QBBEC11032	32	55	6	41,4	44,5	2,9	25
QBBEC11040	40	55	7	52,8	56,2	3,7	45
QBBEC11050	50	55	7	58,8	62,2	4,6	53
QBBEC11063	63	55	8	73,8	78,3	5,8	89

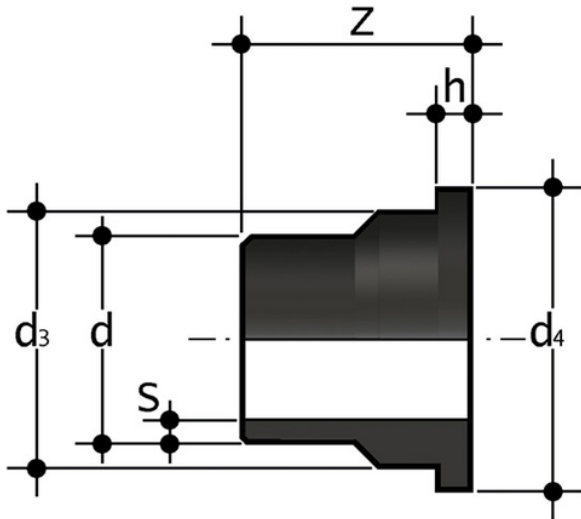

Q/BBE-C - Union end

- Size range: $d 12 \div d 800$ (mm)
- Nominal pressure: SDR 17 (PN10) with water at 20 °C, SDR 11 (PN16) with water at 20 °C
- Temperature range: $-40 \text{ °C} \div 60 \text{ °C}$
- Coupling standards - Reference standards:
 - Welding: EN ISO 15494. Can be coupled to pipes according to EN ISO 15494
 - Flanging system: ISO 7005-1, EN 1092-1, EN ISO 15494, ANSI B16.5 cl.150
 - Construction criteria: UNI EN ISO 15494
 - Test methods and requirements: UNI EN ISO 15494
 - Installation criteria: DVS 2202-1, DVS 2207-1, UNI EN 12201- 3, UNI 10520, ISO 21307, UNI 10521, UNI EN 1555-3, ISO 4427- 3, ISO 4437-3
- Fitting material: PE-HD
- Seal material: EPDM, FKM