


# POWER-LOCK VDA® PN10 - 22° bend

VDA® pressure POWER-LOCK bend, Blu Ral 5010, 22 DEGREES, connection FORSHEDA 601 POWER-LOCK®.



Reference	D (mm)	S (mm)	Lb (mm)	Qty x pallet
PBVDAPN10063F2L	63	2.1	110	80
PBVDAPN10075F2L	75	2.3	120	80
PBVDAPN10090F2L	90	2.6	130	80
PBVDAPN10110F2L	110	3.1	130	60
PBVDAPN10125F2L	125	3.5	150	45
PBVDAPN10140F2L	140	3.9	160	35
PBVDAPN10160F2L	160	4.5	165	25
PBVDAPN10200F2L	200	5.6	180	*
PBVDAPN10225F2L	225	6.3	200	*
PBVDAPN10250F2L	250	7.0	210	*
PBVDAPN10280F2L	280	7.8	210	*
PBVDAPN10315F2L	315	8.8	230	*
PBVDAPN10355F2L	355	9.9	250	*
PBVDAPN10400F2L	400	11.2	250	*

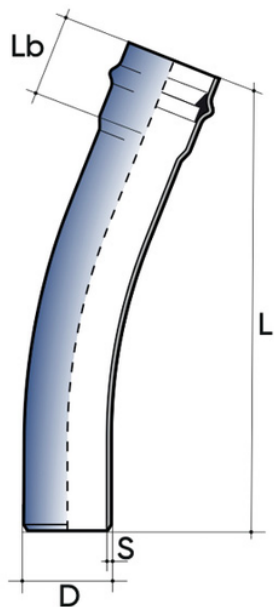

# POWER-LOCK VDA® PN10 - 22° bend

- **Size range:** d 63 ÷ 400 (mm); Degrees: 22°
- **Nominal pressure:** PN10
- **Temperature range:** 0 °C ÷ 60 °C
- **Coupling standards:** FORSHEDA JOINT, gluing on request
- **Reference standards:** Curves produced from certified pipes:
  - KQ KIWA QUALITY KIP-105133- BSPAS27
  - D.M. No.174/2004-potability
  - UNIEN 1622- smell and taste threshold
- **Bend material:** PVC-A colour BLUE RAL 5010