


# POWER-LOCK VDA® PN10 - 30° bend

VDA® pressure POWER-LOCK bend, Blu Ral 5010, 30 DEGREES, connection FORSHEDA 601 POWER-LOCK®.



| Reference       | D (mm) | S (mm) | Lb (mm) | Qty x pallet |
|-----------------|--------|--------|---------|--------------|
| PBVDAPN10063F3L | 63     | 2.1    | 110     | 80           |
| PBVDAPN10075F3L | 75     | 2.3    | 120     | 80           |
| PBVDAPN10090F3L | 90     | 2.6    | 130     | 80           |
| PBVDAPN10110F3L | 110    | 3.1    | 130     | 60           |
| PBVDAPN10125F3L | 125    | 3.5    | 150     | 45           |
| PBVDAPN10140F3L | 140    | 3.9    | 160     | 35           |
| PBVDAPN10160F3L | 160    | 4.5    | 165     | 25           |
| PBVDAPN10200F3L | 200    | 5.6    | 180     | *            |
| PBVDAPN10225F3L | 225    | 6.3    | 200     | *            |
| PBVDAPN10250F3L | 250    | 7.0    | 210     | *            |
| PBVDAPN10280F3L | 280    | 7.8    | 210     | *            |
| PBVDAPN10315F3L | 315    | 8.8    | 230     | *            |
| PBVDAPN10355F3L | 355    | 9.9    | 250     | *            |
| PBVDAPN10400F3L | 400    | 11.2   | 250     | *            |

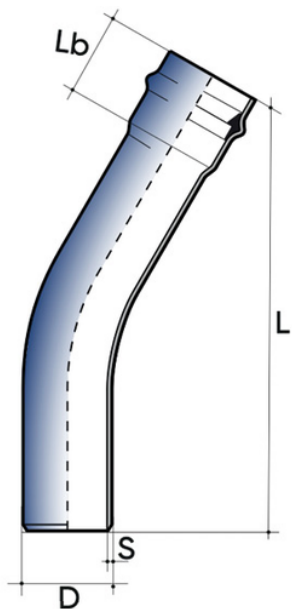

# POWER-LOCK VDA® PN10 - 30° bend

- **Size range:** d 63 ÷ 400 (mm); Degrees: 30°
- **Nominal pressure:** PN10
- **Temperature range:** 0 °C ÷ 60 °C
- **Coupling standards:** FORSHEDA JOINT, gluing on request
- **Reference standards:** Curves produced from certified pipes:
  - KQ KIWA QUALITY KIP-105133- BSPAS27
  - D.M. No.174/2004-potability
  - UNIEN 1622- smell and taste threshold
- **Bend material:** PVC-A colour BLUE RAL 5010