


POWER-LOCK VDA® PN10 - 45° bend

VDA® pressure POWER-LOCK bend, Blu Ral 5010, 45 DEGREES, connection FORSHEDA 601 POWER-LOCK®.



| Reference | D (mm) | S (mm) | Lb (mm) | Qty x pallet |
|-----------------|--------|--------|---------|--------------|
| PBVDAPN10063F4L | 63 | 2.1 | 110 | 80 |
| PBVDAPN10075F4L | 75 | 2.3 | 120 | 80 |
| PBVDAPN10090F4L | 90 | 2.6 | 130 | 80 |
| PBVDAPN10110F4L | 110 | 3.1 | 130 | 60 |
| PBVDAPN10125F4L | 125 | 3.5 | 150 | 45 |
| PBVDAPN10140F4L | 140 | 3.9 | 160 | 35 |
| PBVDAPN10160F4L | 160 | 4.5 | 165 | 25 |
| PBVDAPN10200F4L | 200 | 5.6 | 180 | * |
| PBVDAPN10225F4L | 225 | 6.3 | 200 | * |
| PBVDAPN10250F4L | 250 | 7.0 | 210 | * |
| PBVDAPN10280F4L | 280 | 7.8 | 210 | * |
| PBVDAPN10315F4L | 315 | 8.8 | 230 | * |
| PBVDAPN10355F4L | 355 | 9.9 | 250 | * |
| PBVDAPN10400F4L | 400 | 11.2 | 250 | * |

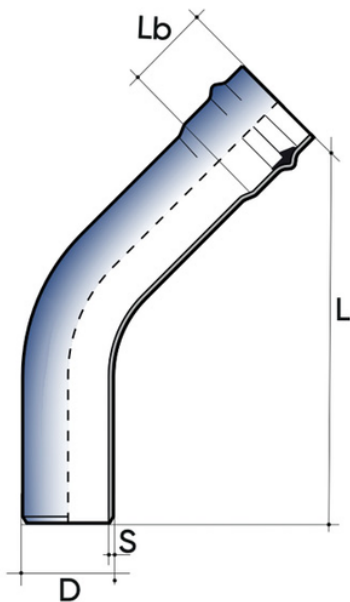

POWER-LOCK VDA® PN10 - 45° bend

- **Size range:** d 63 ÷ 400 (mm); Degrees: 45°
- **Nominal pressure:** PN10
- **Temperature range:** 0 °C ÷ 60 °C
- **Coupling standards:** FORSHEDA JOINT, gluing on request
- **Reference standards:** Curves produced from certified pipes:
 - KQ KIWA QUALITY KIP-105133- BSPAS27
 - D.M. No.174/2004-potability
 - UNIEN 1622- smell and taste threshold
- **Bend material:** PVC-A colour BLUE RAL 5010