

PP Vertical outlet floor drain without trap

Especially designed for public premises, balconies, industrial kitchens, public lavatories and in all cases a trapping action is required.

Use: to collect rain and waste water.


Advantages:

- round plate and flange to lock the insulating membrane
- 360° adjustable riser
- easy inspection.

All products can be classified in load class K3 in accordance with regulation EN 1253 (resistance >300 kg). All tests have been carried out at Aliaxis laboratories.

Supplied with protection to permit easy installation.

Tested by MPA.

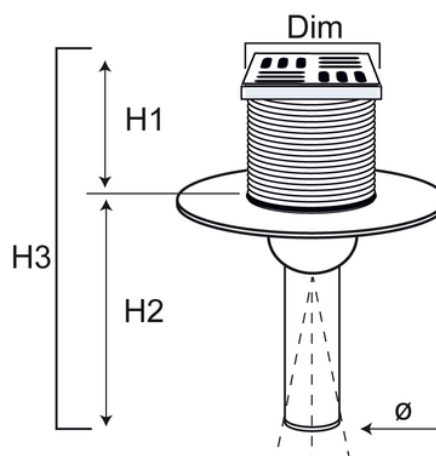

Reference	RAL	H1 (mm)	Dim (mm)	Ø1 (mm)	H1 mm Min	h3MmMin	h3MmMax	l/s	Material	Grill
E7810AI	7035	100	100	50	165	179	254	1,9	PP	Inox
E7810PP	7035	100	100	50	165	179	254	2,3	PP	PP
E7815AI	7035	100	150	50	165	179	254	2,6	PP	Inox