

# PP Vertical outlet floor drain without trap

Especially designed for public premises, balconies, industrial kitchens, public lavatories and in all cases a trapping action is required.

Use: to collect rain and waste water.


Advantages:

- round plate and flange to lock the insulating membrane
- 360° adjustable riser
- easy inspection.

All products can be classified in load class K3 in accordance with regulation EN 1253 (resistance >300 kg). All tests have been carried out at Aliaxis laboratories.

Supplied with protection to permit easy installation.

Tested by MPA.

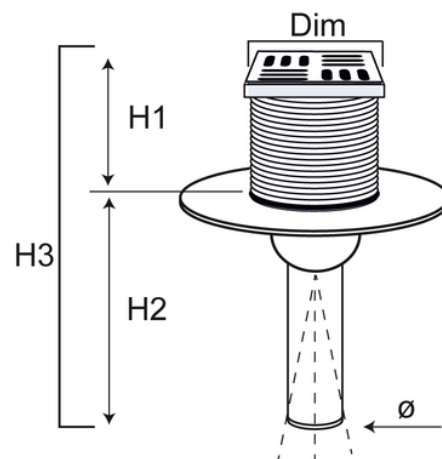

| Reference | RAL  | H1 (mm) | Dim (mm) | Ø1 (mm) | H1 mm Min | h3MmMin | h3MmMax | l/s | Material | Grill |
|-----------|------|---------|----------|---------|-----------|---------|---------|-----|----------|-------|
| E7810AI   | 7035 | 100     | 100      | 50      | 165       | 179     | 254     | 1,9 | PP       | Inox  |
| E7810PP   | 7035 | 100     | 100      | 50      | 165       | 179     | 254     | 2,3 | PP       | PP    |
| E7815AI   | 7035 | 100     | 150      | 50      | 165       | 179     | 254     | 2,6 | PP       | Inox  |