

# PP Horizontal outlet floor drain without trap

Especially designed for public premises, balconies, industrial kitchens, public lavatories and in all cases a trapping action is required.

Use: to collect rain and waste water.


Advantages:

- very low casing
- round plate and flange to lock the insulating membrane
- 360° adjustable riser
- easy inspection.

All products can be classified in load class K3 in accordance with regulation EN 1253 (resistance >300 kg). All tests have been carried out at Aliaxis laboratories.

Supplied with protection to permit easy installation.

Tested by MPA.

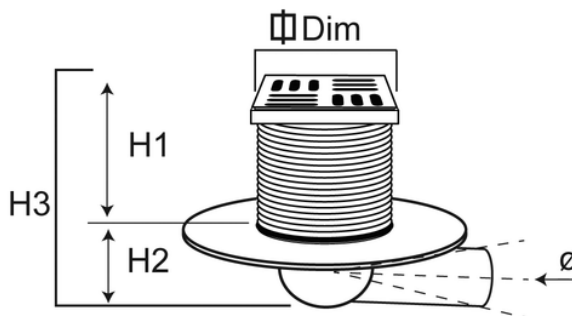

Reference	RAL	H1 (mm)	Ø (mm)	Dim (mm)	H1 mm Min	h3MmMin	h3MmMax	l/s	Material	Grill
E7910AI	7035	100	50	100	95	128	183	1,4	PP	Inox
E7910PP	7035	100	50	100	95	128	183	1,7	PP	PP
E7915AI	7035	100	50	150	95	128	183	1,9	PP	Inox
E7915PP	7035	100	50	150	95	128	183	1,8	PP	PP