
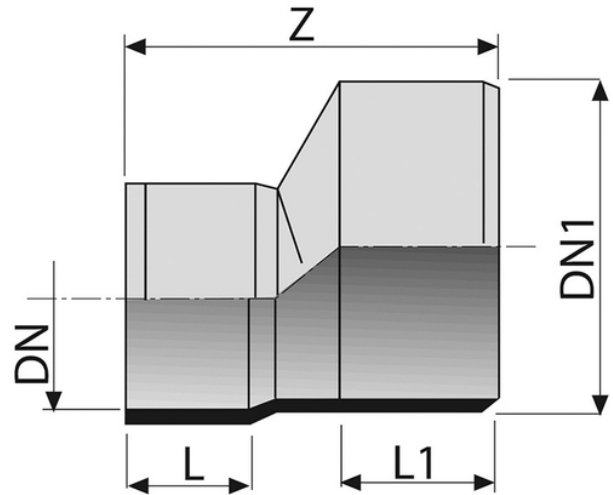


Invert reducer M/F

- EN 1329 Solvent Welded PVC-U Fittings
- B s2 d0 Fire Reaction Euroclass
- Color: RAL 7037 Grey

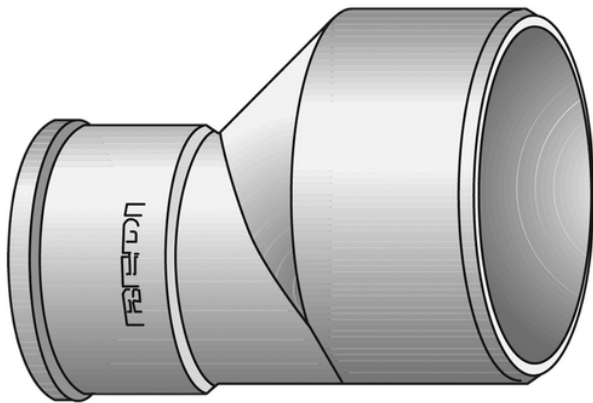

Reference	DN1 (mm)	Z (mm)	L (mm)	L1 (mm)	DN (mm)	Version
091050M	50	75	23	32	32	-
091250M	50	71	27	32	40	-
0900602	63	116	-	50	40	-
090480M	100	142	36	58	40	upon request
090260M	63	114	40	50	50	-
051070M	75	115	40	48	50	-
090080M	80	128	40	53	50	-
090100M	100	148	40	62	50	-
051110M	110	173	40	70	50	-
0902802	80	122	43	53	63	-
0903002	100	142	43	61	63	upon request
0513102	110	-	-	-	75	-
090500M	100	135	46	61	80	-
090120M	125	134	57	61	100	-
E511002	140	-	-	-	100	-
E511302	160	-	-	-	100	-
E511502	200	115	-	48	100	-
051320M	125	148	56	69	110	-

Invert reducer M/F

Reference	DN1 (mm)	Z (mm)	L (mm)	L1 (mm)	DN (mm)	Version
0511602	160	180	56	82	110	-
0513602	160	180	62	82	125	-
0512002	200	221	62	100	125	-
0534202	250	159	62	90	125	-
0515602	160	166	60	81	140	-
0514002	200	211	74	100	160	-
0514602	250	172	74	90	160	-
0534802	315	174	74	93	160	-
0512502	250	265	86	134	200	-
0513302	315	318	86	145	200	-
0513002	315	307	103	144	250	-
0519202	400	363	118	156	315	-
E512202	200	-	-	-	140	upon request