


POLI, activated sludge system

Activated Sludge Treatment System, consisting of 2 compartments: aeration compartment with air compressor fine bubble diffuser and settling chamber with air-lift system.

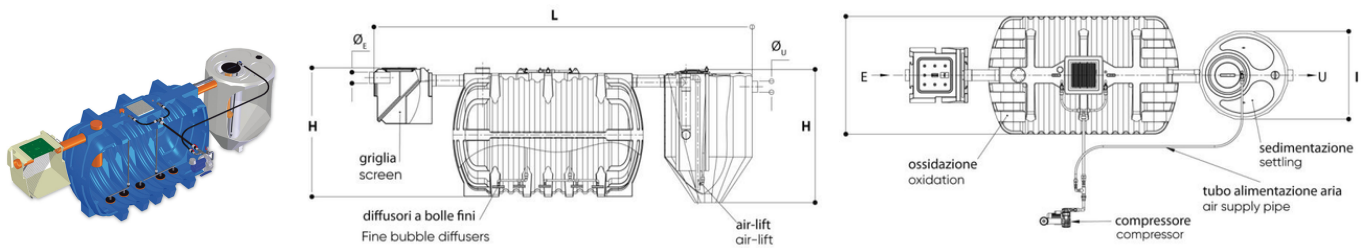

Reference	Height H (cm)	V _{ox} (m ³)	V _{sett} (m ³)	ØE e ØU (mm)	Power (Kw)	I (cm)	L (cm)	Item	Users (E.I.)
IS09022	212	6	2,5	160	0,7 (kW)	186	610	A.E. 50 (220V)	50
IS90221	212	6	2,5	160	0,7 (kW)	186	610	A.E. 50 (380V)	50
IS09032	240	8	4,0	160	1,1 (kW)	196	700	A.E. 75 (380V)	75
IS09023	240	10	4,0	200	1,5 (kW)	214	710	A.E. 100 (380V)	100
IS09024	240	16	6,5	200	2,2 (kW)	450	850	A.E. 150 (380V)	150
IS09025	240	20	8,0	200	2,2 (kW)	480	870	A.E. 200 (380V)	200