


DIMV

Double adaptor with solvent weld socket d_f , solvent weld spigot d_m and BSP threaded female end R with stainless steel reinforcing ring (fig. B).

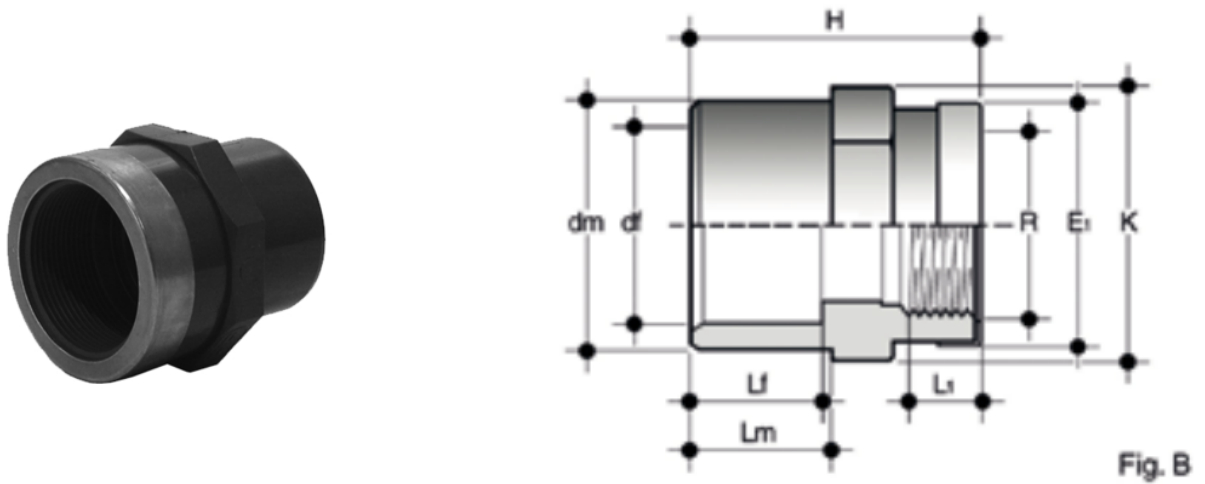

Reference	$d_m \times d_f \times R$	PN	E	E[5:1]	H	K	L_1	L_f	L_m	g
DIMV020016012	20 x 16 x 1/2"	16	-	29,5	40	30	15	14	16	21
DIMV025020034	25 x 20 x 3/4"	16	-	36	46	36	16,3	16	19	34
DIMV032025100	32 x 25 x 1"	16	-	44	52	46	19,1	19	22	58
DIMV040032114	40 x 32 x 1 1/4"	16	-	55	63	54	21,4	22	26	85
DIMV050040112	50 x 40 x 1 1/2"	16	-	62	73	65	21,4	26	31	141
DIMV063050200	63 x 50 x 2"	16	-	77	87	80	25,7	31	38	212
DIMV075063200	75 x 63 x 2"	16	-	77	77	76	25,7	38	44	202