


# DIFV

Double adaptor with solvent weld socket  $df$ , solvent weld spigot  $dm$  and BSP threaded female end R (fig. B).

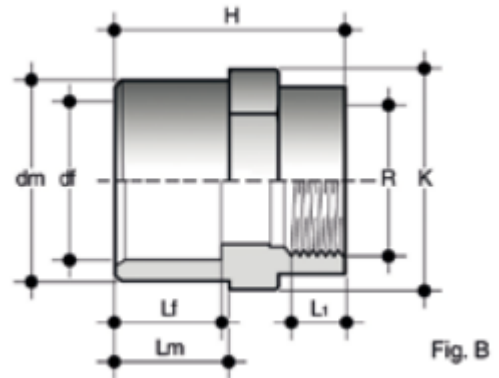

Reference	$dm \times df \times R$	PN	E	H	K	$L_1$	$L_f$	$L_m$	g
DIFV020016012	20 x 16 x 1/2"	16	-	39	30	15	14	16	18
DIFV025020034	25 x 20 x 3/4"	16	-	45	36	16,3	16	19	28
DIFV032025100	32 x 25 x 1"	16	-	51	46	19,1	19	22	49
DIFV040032114	40 x 32 x 1 1/4"	16	-	62	54	21,4	22	26	74
DIFV050040112	50 x 40 x 1 1/2"	16	-	72	65	21,4	26	31	127
DIFV063050200	63 x 50 x 2"	16	-	86	80	25,7	31	38	190
DIFV075063200	75 x 63 x 2"	16	-	76	76	25,7	38	44	180
DIFV075063212	75 x 63 x 2 1/2"	16	-	99	95	30,2	38	44	280
DIFV090075212	90 x 75 x 2 1/2"	16	-	84	95	30,2	44	51	300
DIFV090075300	90 x 75 x 3"	16	-	114	110	33,3	44	51	470
DIFV110090300	110 x 90 x 3"	16	-	100	110	33,3	51	61	450
DIFV110090400	110 x 90 x 4"	16	-	134	130	39,3	51	61	670
DIFV125110400	125 x 110 x 4"	16	-	111	131	39,3	61	69	550