

# DIMV

Double adaptor with solvent weld socket  $df$ , solvent weld spigot  $dm$  and BSP threaded female end  $R$  with stainless steel reinforcing ring (fig. A).

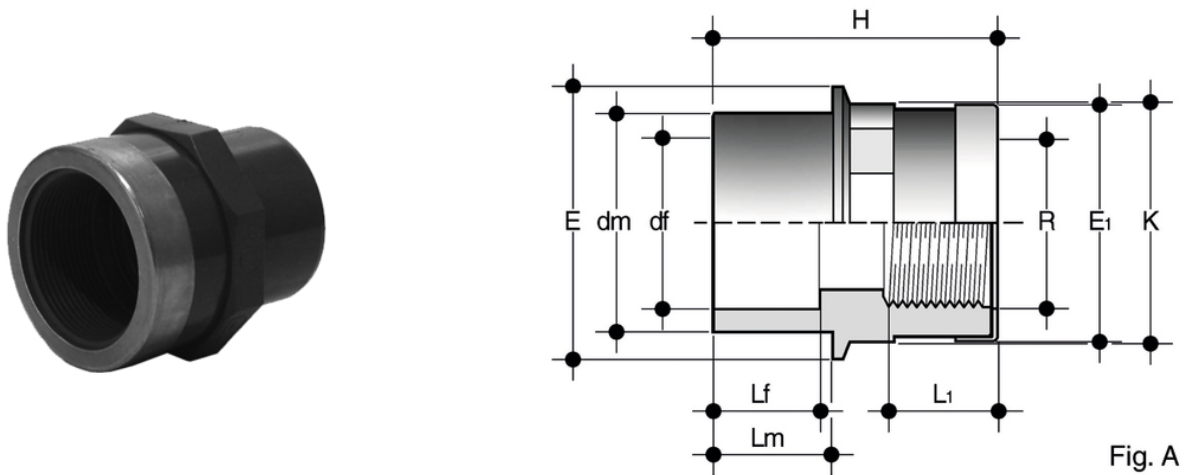


Fig. A

Reference	$dm \times df \times R$	PN	E	E[5:1]	H	K	L <sub>1</sub>	L <sub>f</sub>	L <sub>m</sub>	g
DIMV020016038	20 x 16 x 3/8"	16	28	24,5	37	24	11,4	14	16	13
DIMV025020012	25 x 20 x 1/2"	16	34	29,5	43	29	15	16	19	20
DIMV032025034	32 x 25 x 3/4"	16	40	36	50	35	16,3	19	22	32
DIMV040032100	40 x 32 x 1"	16	52	44	58	44	19,1	22	26	58
DIMV050040114	50 x 40 x 1 1/4"	16	59	55	68	54	21,4	26	31	77
DIMV063050112	63 x 50 x 1 1/2"	16	70	62	78	64	21,4	31	38	143