


TRBM PN10 SDR 11 - S 5 - Reducer

90° reducing Tee, short spigot for butt welding PN10 SDR 11 - S 5.



Reference	d ₁	d ₂	i[5:1]	i[5:2]	L	s[5:1]	s[5:2]	Z ₂	g
TRBM11063050	*63	50	63	56	220	4,6	4,6	103	292
TRBM11075032	*75	32	70	46	256	6,8	2,9	103	498
TRBM11075050	*75	50	75	56	265	4,6	4,6	113	530
TRBM11075063	*75	63	72	63	260	5,8	5,8	117	537
TRBM11090032	90	32	53	23	203	8,2	2,9	85	562
TRBM11090050	90	32	53	23	203	8,2	2,9	85	562
TRBM11090063	*90	63	82	66	282	8,2	5,8	127	739
TRBM11090075	*90	75	73	68	280	8,2	6,8	138	796
TRBM11110032	110	32	66	22	234	10	2,9	91	906
TRBM11110050	110	50	70	27	244	10	4,6	103	945
TRBM11110063	*110	63	88	68	328	10	5,8	149	1240
TRBM11110075	*110	75	86	70	320	10	6,8	151	1180
TRBM11110090	*110	90	86	79	320	10	8,2	158	1261
TRBM11125063	125	63	76	31	280	11,4	5,8	112	1400
TRBM11125090	*125	90	112	92	340	11,4	8,2	170	1640
TRBM11125110	*125	110	90	83	341	11,4	10	170	1850
TRBM11140063	140	63	87	32	302	12,7	5,8	120	1800
TRBM11140075	140	75	54	35	305	12,7	6,8	130	1920
TRBM11140090	140	90	88	42	305	12,7	8,2	130	1840
TRBM11140110	140	110	50	44	291	12,7	10	140	2180

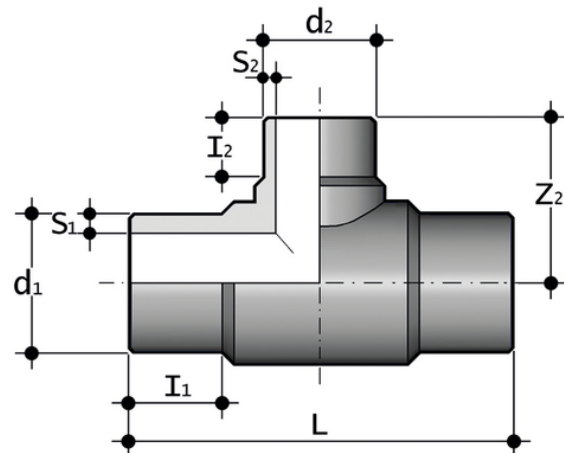

TRBM PN10 SDR 11 – S 5 – Reducer

Reference	d ₁	d ₂	i[5:1]	i[5:2]	L	s[5:1]	s[5:2]	Z ₂	g
TRBM11160063	*160	63	100	67	347	14,6	5,8	175	2560
TRBM11160075	*160	75	98	74	343	14,6	6,8	180	2620
TRBM11160090	*160	90	104	83	412	14,6	8,2	190	2620
TRBM11160110	*160	110	104	89	414	14,6	10	200	3160
TRBM11160125	160	125	62	52	335	14,6	11,4	158	2720
TRBM11180063	180	63	134	32	367	16,4	5,8	144	3040
TRBM11180075	180	75	123	31	366	16,4	6,8	148	3100
TRBM11180090	*180	90	138	97	427	16,4	8,2	200	4240
TRBM11180110	*180	110	148	101	464	16,4	10	225	4600
TRBM11180125	180	125	100	52	366	16,4	11,4	166	3280
TRBM11200063	*200	63	122	63	500	18,2	5,8	190	6940
TRBM11200090	*200	90	122	79	498	18,2	5,1	207	6860
TRBM11200110	*200	110	122	82	500	18,2	6,3	215	6980
TRBM11200125	*200	125	115	43	388	18,2	11,4	165	6920
TRBM11200160	*200	160	122	98	500	18,2	9,1	234	8340
TRBM11225075	*225	75	120	70	555	20,5	6,8	227	6620
TRBM11225090	*225	90	129	82	556	20,5	8,2	228	6660
TRBM11225110	*225	110	130	86	556	20,5	10	238	6660
TRBM11225125	225	125	135	40	456	20,5	11,4	178	6120
TRBM11225180	225	180	135	135	558	20,5	16,4	280	9800
TRBM11250110	*225	110	135	38	450	22,7	10	197	12460
TRBM11250160	*250	160	110	58	458	22,7	14,6	213	12960
TRBM11315110	*315	110	150	82	695	28,6	10	277	15680
TRBM11315160	*315	160	150	102	695	28,6	14,6	290	17020
TRBM11315225	*315	225	170	145	650	28,6	20,5	335	20580
TRBM11315250	*315	250	150	130	695	28,6	22,7	325	21840

