


C6.30 - Inductive conductivity transmitter

C-PVC Inductive Conductivity Transmitter with Temperature Sensor (Pt100) included.

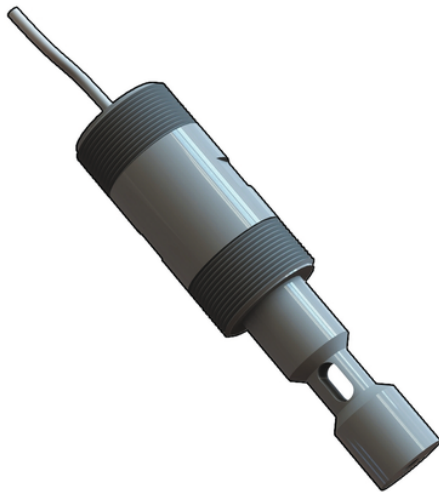

Reference	Description	Operative Range	Connection	Installation
C6.30.01	Pt100 included	0-10 mS/cm	3 m	1 1/2" NPT male threaded
C6.30.02	Pt100 included	0-100 mS/cm	3 m	1 1/2" NPT male threaded
C6.30.03	Pt100 included	0-1000 mS/cm	3 m	1 1/2" NPT male threaded

C6.30 - Inductive conductivity transmitter

APPLICATIONS:

- Water treatment
- Waste water treatment
- Cooling towers
- Scrubber systems
- Metal finishing Coating and corrosion fluid measurement

MAIN FEATURES:

- Corrosion & coating resistant
- Compact transmitter
- No calibration required
- Easy installation
- Pt100 sensor integrated
- Suitable for submersible installation