


# TRBE SDR17 - 90° reducing Tee

90° reducing Tee, short spigot for butt welding SDR 17 - S 8.



Codice	d <sub>1</sub>	d <sub>2</sub>	L	Z <sub>2</sub>	h <sub>1</sub>	l <sub>2</sub>	S <sub>1</sub>	S <sub>2</sub>	g
TRBE17140063	*140	63	291	120	83	32	8,3	3,8	1380
TRBE17140075	*140	75	291	130	81	35	8,3	4,5	1380
TRBE17140090	*140	90	291	130	81	41	8,3	5,4	1409
TRBE17140110	*140	110	291	140	50	44	8,3	6,6	1720
TRBE17160125	*160	125	315	150	58	47	9,5	7,4	2220
TRBE17180063	*180	63	348	140	125	30	10,7	3,8	2180
TRBE17180075	*180	75	348	160	112	30	10,7	4,5	2200
TRBE17180125	*180	125	348	150	92	50	10,7	7,4	2350
TRBE17225110	*225	110	556	236	130	86	13,4	6,6	4520
TRBE17225125	*225	125	445	180	135	40	13,4	7,4	4380

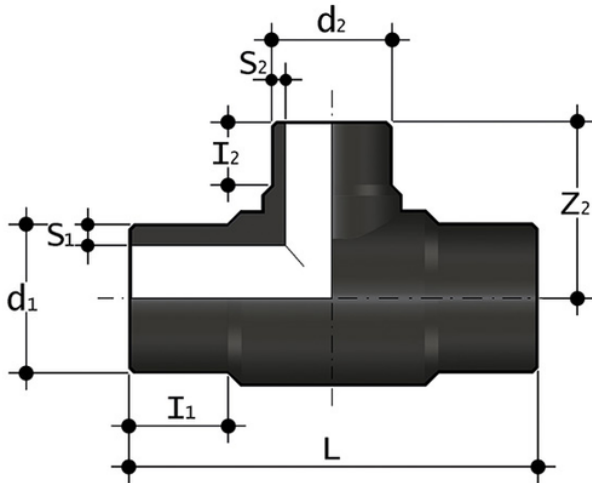

## TRBE SDR17 – 90° reducing Tee

- Size range:  $d 12 \div d 800$  (mm)
- Nominal pressure: SDR 17 (PN10) with water at 20 °C, SDR 11 (PN16) with water at 20 °C
- Temperature range:  $-40 \text{ °C} \div 60 \text{ °C}$
- Coupling standards – Reference standards:
  - Welding: EN ISO 15494. Can be coupled to pipes according to EN ISO 15494
  - Flanging system: ISO 7005-1, EN 1092-1, EN ISO 15494, ANSI B16.5 cl.150
  - Construction criteria: UNI EN ISO 15494
  - Test methods and requirements: UNI EN ISO 15494
  - Installation criteria: DVS 2202-1, DVS 2207-1, UNI EN 12201- 3, UNI 10520, ISO 21307, UNI 10521, UNI EN 1555-3, ISO 4427- 3, ISO 4437-3
- Fitting material: PE-HD
- Seal material: EPDM, FKM