


CBE SDR11 - End cap

End cap, short spigot for butt welding SDR 11 - S5.

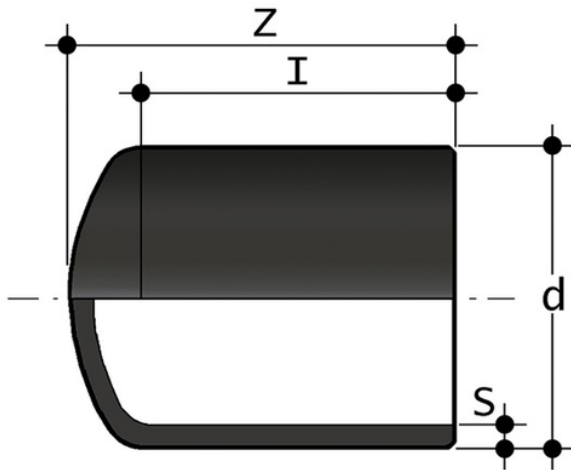

Codice	d	Z	I	S	g
CBE11450	*450	95	17	40,9	12700
CBE11500	*500	90	18	29,7	14200
CBE11560	*560	115	19	50,8	24100
CBE11630	*630	125	17	57,2	33900
CBE17710	*710	130	26	42,1	33500

CBE SDR11 – End cap

- Size range: $d 12 \div d 800$ (mm)
- Nominal pressure: SDR 17 (PN10) with water at 20 °C, SDR 11 (PN16) with water at 20 °C
- Temperature range: $-40 \text{ °C} \div 60 \text{ °C}$
- Coupling standards – Reference standards:
 - Welding: EN ISO 15494. Can be coupled to pipes according to EN ISO 15494
 - Flanging system: ISO 7005-1, EN 1092-1, EN ISO 15494, ANSI B16.5 cl.150
 - Construction criteria: UNI EN ISO 15494
 - Test methods and requirements: UNI EN ISO 15494
 - Installation criteria: DVS 2202-1, DVS 2207-1, UNI EN 12201- 3, UNI 10520, ISO 21307, UNI 10521, UNI EN 1555-3, ISO 4427- 3, ISO 4437-3
- Fitting material: PE-HD
- Seal material: EPDM, FKM