


# QBE/FK SDR 17 - Machined stub flange

Machined stub flange, short spigot, for butt welding for FIP butterfly valve type FE and FK SDR 17 - S8.

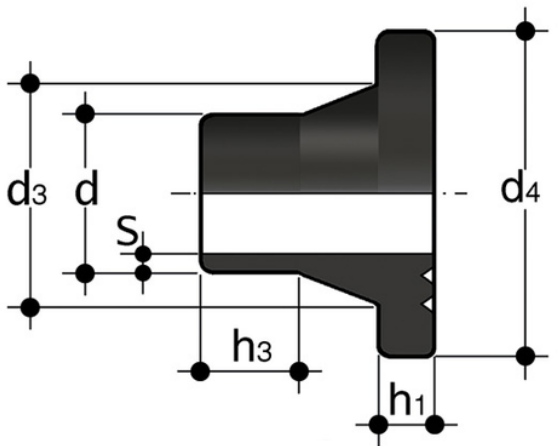

| Codice     | d   | DN  | h <sub>1</sub> | h <sub>3</sub> | d <sub>3</sub> | d <sub>4</sub> | S    | g    |
|------------|-----|-----|----------------|----------------|----------------|----------------|------|------|
| QBE17FK200 | 200 | 200 | 24             | 36             | 232            | 268            | 11,9 | 1760 |
| QBE17FK250 | 250 | 250 | 25             | 35             | 285            | 320            | 14,8 | 1460 |
| QBE17FK315 | 315 | 300 | 25             | 35             | 335            | 370            | 18,7 | 3600 |
| QBE17FK355 | 355 | 355 | 30             | 99             | 373            | 430            | 21,1 | 5400 |
| QBE17FK400 | 400 | 400 | 33             | 195            | 427            | 482            | 23,7 | 7120 |

# QBE/FK SDR 17 – Machined stub flange

- Size range: d 12 ÷ d 800 (mm)
- Nominal pressure: SDR 17 (PN10) with water at 20 °C, SDR 11 (PN16) with water at 20 °C
- Temperature range: -40 °C ÷ 60 °C
- Coupling standards – Reference standards:
  - Welding: EN ISO 15494. Can be coupled to pipes according to EN ISO 15494
  - Flanging system: ISO 7005-1, EN 1092-1, EN ISO 15494, ANSI B16.5 cl.150
  - Construction criteria: UNI EN ISO 15494
  - Test methods and requirements: UNI EN ISO 15494
  - Installation criteria: DVS 2202-1, DVS 2207-1, UNI EN 12201- 3, UNI 10520, ISO 21307, UNI 10521, UNI EN 1555-3, ISO 4427- 3, ISO 4437-3
- Fitting material: PE-HD
- Seal material: EPDM, FKM