


HDE SDR17 - 45° elbow

45° elbow, long spigot for butt welding.



Codice	d	Z	l	s	g
HDE17050	*50	76	61	3,0	84
HDE17063	*63	88	65	3,8	145
HDE17075	*75	90	71	4,5	200
HDE17090	*90	105	83	5,4	340
HDE17110	*110	121	91	6,6	575
HDE17125	*125	137	97	7,4	815
HDE17140	*140	168	120	8,3	1276
HDE17160	*160	190	142	9,5	1875
HDE17180	*180	196	141	10,7	2450
HDE17200	*200	207	152	11,9	3300
HDE17225	*225	210	153	13,4	4280
HDE17250	*250	220	133	14,8	5860
HDE17280	*280	227	142	16,6	7650
HDE17315	*315	250	154	18,7	10440

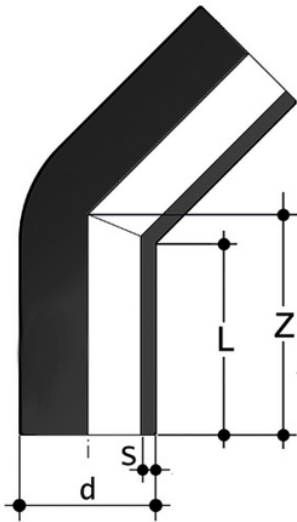

HDE SDR17 - 45° elbow

- Size range: d 12 ÷ d 800 (mm)
- Nominal pressure: SDR 17 (PN10) with water at 20 °C, SDR 11 (PN16) with water at 20 °C
- Temperature range: -40 °C ÷ 60 °C
- Coupling standards - Reference standards:
 - Welding: EN ISO 15494. Can be coupled to pipes according to EN ISO 15494
 - Flanging system: ISO 7005-1, EN 1092-1, EN ISO 15494, ANSI B16.5 cl.150
 - Construction criteria: UNI EN ISO 15494
 - Test methods and requirements: UNI EN ISO 15494
 - Installation criteria: DVS 2202-1, DVS 2207-1, UNI EN 12201- 3, UNI 10520, ISO 21307, UNI 10521, UNI EN 1555-3, ISO 4427- 3, ISO 4437-3
- Fitting material: PE-HD
- Seal material: EPDM, FKM