


CDE SDR17 - End cap

End cap, long spigot for butt welding SDR 17 - S8.

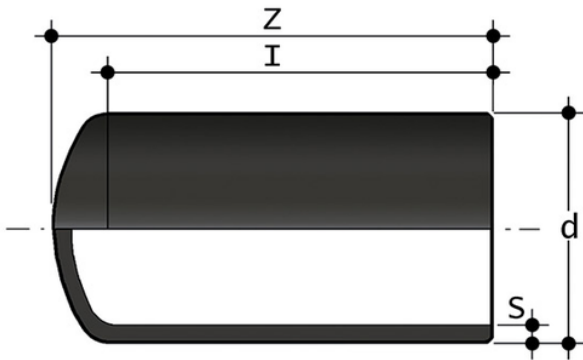

Codice	d	Z	I	S	g
CDE17050	*50	70	59	3,0	34
CDE17125	*125	127	92	7,4	360
CDE17140	*140	136	97	8,3	480
CDE17160	*160	155	107	9,5	740
CDE17180	*180	166	114	10,7	975
CDE17200	*200	179	117	11,9	1310
CDE17225	*225	203	127	13,4	1805
CDE17250	*250	216	140	14,8	2425
CDE17280	*280	238	149	16,6	3285
CDE17315	*315	258	158	18,7	4610
CDE17355	*355	281	175	21,1	6610
CDE17400	*400	310	195	23,7	9185

CDE SDR17 – End cap

- Size range: $d 12 \div d 800$ (mm)
- Nominal pressure: SDR 17 (PN10) with water at 20 °C, SDR 11 (PN16) with water at 20 °C
- Temperature range: $-40 \text{ °C} \div 60 \text{ °C}$
- Coupling standards – Reference standards:
 - Welding: EN ISO 15494. Can be coupled to pipes according to EN ISO 15494
 - Flanging system: ISO 7005-1, EN 1092-1, EN ISO 15494, ANSI B16.5 cl.150
 - Construction criteria: UNI EN ISO 15494
 - Test methods and requirements: UNI EN ISO 15494
 - Installation criteria: DVS 2202-1, DVS 2207-1, UNI EN 12201- 3, UNI 10520, ISO 21307, UNI 10521, UNI EN 1555-3, ISO 4427- 3, ISO 4437-3
- Fitting material: PE-HD
- Seal material: EPDM, FKM