



# PRATICA PUBLIC, per acque bianche e nere

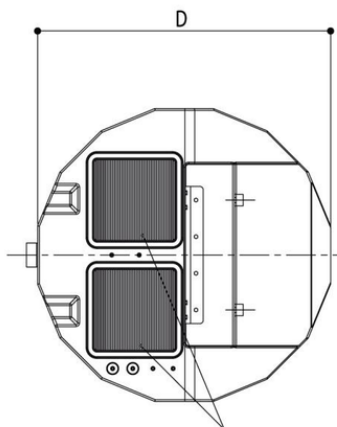

chiusini in PVC  
PVC cover

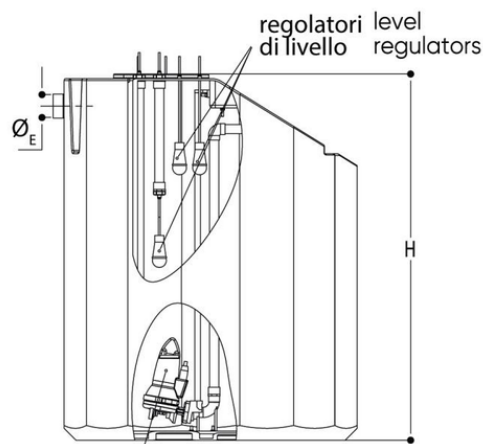

elettropompa submersibile motor-driven pump  
regolatori di livello level regulators

Codice	D (cm)	Altezza H (cm)	ØE (mm)	Potenza pompa (Kw)	Capacità (litri)	Tensione (V)	Portata Q (m <sup>3</sup> /h)	Mandata	Articolo	Prevalenza H (m)
ISO4600	160	200	200	1,1	3.000	380	0 - 42	2	3000 B2	2 - 15
ISO4601	160	200	200	1,1	3.000	380	0 - 36	2	3000 E2	2 - 11
ISO4602	160	200	200	2,6	3.000	380	0 - 12,5	1½	3000 R2	4 - 21
ISO4603	160	240	200	1,5	4.000	380	0 - 48	2	4000 B2	3 - 18
ISO4604	160	240	200	1,5	4.000	380	0 - 42	2	4000 E2	2 - 13
ISO4605	160	240	200	2,6	4.000	380	0 - 12,5	1½	4000 R2	4 - 21
ISO4606	160	280	200	2,2	5.000	380	0 - 54	2	5000 B2	5 - 20
ISO4607	160	280	200	2,2	5.000	380	0 - 48	2	5000 E2	3 - 17
ISO4608	160	280	200	2,6	5.000	380	0 - 12,5	1½	5000 R2	4 - 21