


EPDM

Valvola a 3 vie DUAL BLOCK[®] con attacchi femmina filettatura cilindrica gas con attuatore elettrico 24 V AC/DC sfera a "T", configurazione 1.

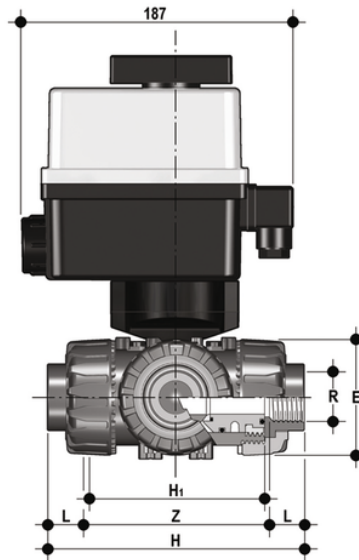

Codice	R	DN	PN	E	H	H ₁	L	Z	g
TKDFMEL012E1	1/2"	15	10	54	125	80	15	95	1728
TKDFMEL034E1	3/4"	20	10	65	146	100	16,3	114	1876
TKDFMEL100E1	1"	25	10	73	166	110	19,1	129	2014
TKDFMEL114E1	1" 1/4	32	10	86	195,5	131	21,4	151	2425
TKDFMEL112E1	1" 1/2	40	10	98	211	148	21,4	166	2652
TKDFMEL200E1	2"	50	10	122	253,5	179	25,7	199	3357