



LPF650BTE



Smart Connect



**FIP Formatura Iniezione Polimeri**

Loc. Pian di Parata


16015 Casella Genova Italy

Tel. +39 0109621.1 - Fax +39 010 9621.209

info.fip@aliaxis.com

[www.aliaxis.it](http://www.aliaxis.it)

- **Maximum signal range:** 10 m, even in the presence of obstacles
- **Installation parameters setting:** material and size of the pipe, K-factor
- **Protection** of settings access, via user password
- **Multilingual interface**
- **Reading of the instantaneous and totalized flowrate**, and related current output value
- **Auto flow rate calibration**
- **Measurement units setting**, filters, and measurement percentage correction
- **Setting of the flow measurement range** corresponding to the 4–20mA range
- **Simulation of current values** for evaluation of calibration and linearity of output
- **Data logger**

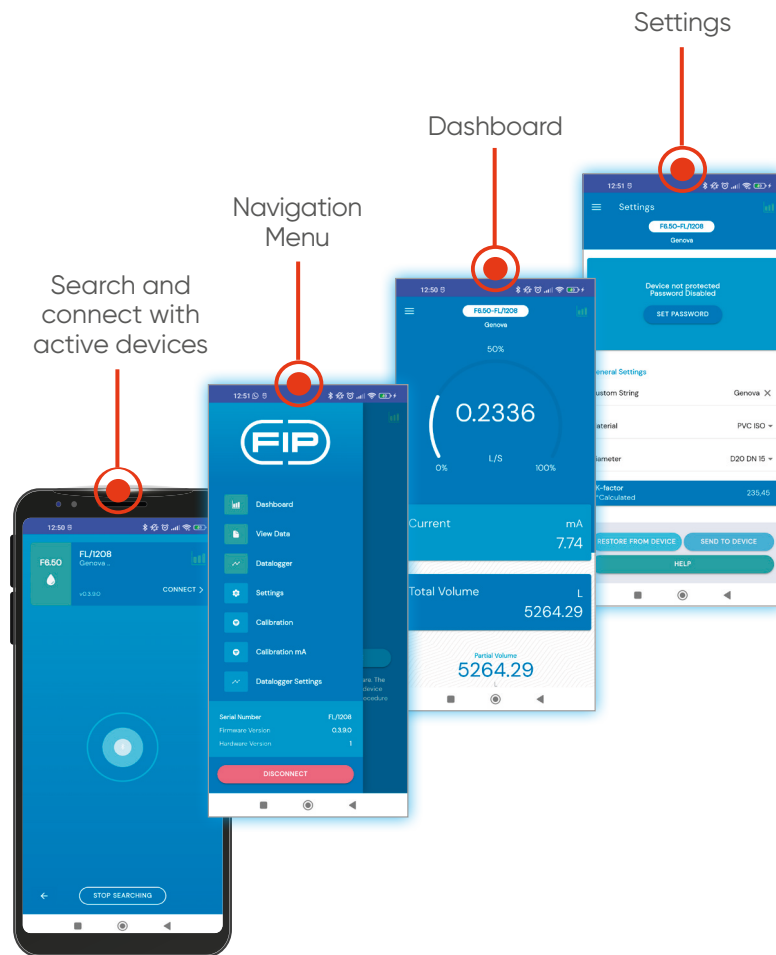

The new **F6.50 Flow Transmitter** communicates with the user via the **Smart Connect App**, through **Bluetooth®** connection.

**Smart Connect** allows the user to interact with the transmitter in a simple and fast way to access the instrument settings, or for a proximity reading of the information detected during its use.



## F6.50 Paddlewheel Flow Transmitter

