


FROAM - Clapet valve DN 32:400

Clapet valve in PP-H without spring, ANSI150 series.

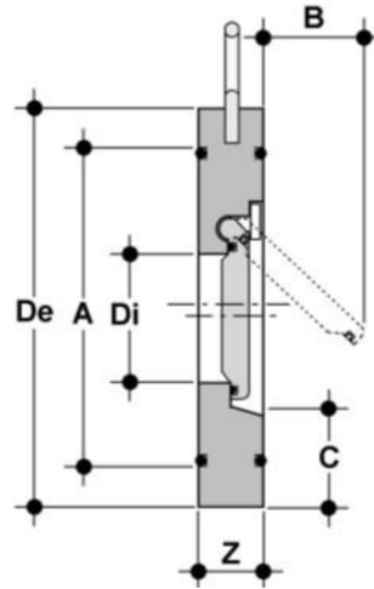

EPDM

Reference	d	DN	PN	product.detail.attribute.De ANSI150	Z	Di	A	B	C	g
FROAM112E	1 1/2"	40	8	83	16	22	72	25	28	100
FROAM114E	1 1/4"	32	10	74	15	18	59	22	25	140
FROAM200E	2"	50	8	105	18	32	86	37	29	180
FROAM212E	2 1/2"	65	8	124	20	40	105	50	31	230
FROAM300E	3"	80	6	137	20	54	119	61	32	270
FROAM400E	4"	100	6	175	23	70	146	77	31	380
FROAM500E	5"	125	6	197	23	92	173	94	35	510
FROAM600E	6"	150	6	222	26	105	197	100	40	760
FROAM800E	8"	200	6	279	34	154	255	152	38	1430
FROAM810E	10"	250	5	340	40	192	312	180	41	2440
FROAM812E	12"	300	5	410	45	227	363	215	41	3570
FROAM814E	14"	350	5	451	49	266	416	245	44	5123
FROAM816E	16"	400	5	514	65	310	467	285	50	8462

FKM

Reference	d	DN	PN	product.detail.attribute.De ANSI150	Z	Di	A	B	C	g
FROAM112F	1 1/2"	40	8	83	16	22	72	25	28	100



FROAM - Clapet valve DN 32:400

Reference	d	DN	PN	product.detail.attribute.De ANSI150	Z	Di	A	B	C	g
FROAM114F	1 1/4"	32	10	74	15	18	59	22	25	140
FROAM200F	2"	50	8	105	18	32	86	37	29	180
FROAM212F	2 1/2"	65	8	124	20	40	105	50	31	230
FROAM300F	3"	80	6	137	20	54	119	61	32	270
FROAM400F	4"	100	6	175	23	70	146	77	31	380
FROAM500F	5"	125	6	197	23	92	173	94	35	510
FROAM600F	6"	150	6	222	26	105	197	100	40	760
FROAM800F	8"	200	6	279	34	154	255	152	38	1430
FROAM810F	10"	250	5	340	40	192	312	180	41	2440
FROAM812F	12"	300	5	410	45	227	363	215	41	3570
FROAM814F	14"	350	5	451	49	266	416	245	44	5123
FROAM816F	16"	400	5	514	65	310	467	285	50	8462



FROAM - Clapet valve DN 32:400

- Installed with FIP QPV (d50 - d160) stubs and QRV stubs using flat gasket QHV/Y (d225 - d315), on PVC piping class PN10 or lower with type ODV flanges
- **Metal support for easy and precise centring** of the valve during installation
- Can be installed in either a vertical or horizontal position
- **Sealing system with O-ring** for optimum sealing and installation without flat gaskets