


# FROAV – Clapet valve DN 32:400

Clapet valve in PVC-U without spring, ANSI150 series.

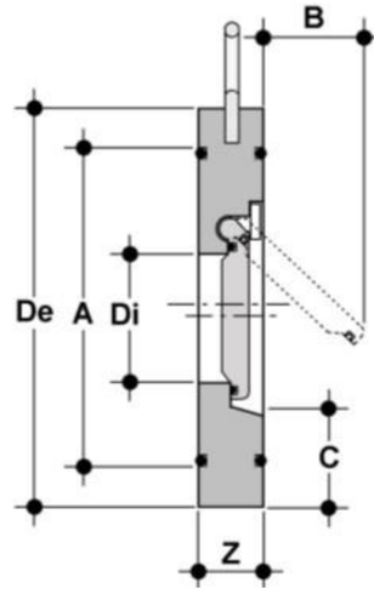

## EPDM

Reference	d	DN	PN	product.detail.attribute.De ANSI150	Z	Di	A	B	C	g
FROAV112E	1"1/2	40	10	83	16	22	72	25	28	160
FROAV816E	16"	400	5	514	65	310	467	285	50	12975
FROAV814E	14"	350	5	451	49	266	416	245	44	7855
FROAV812E	12"	300	5	410	45	227	363	215	41	5350
FROAV810E	10"	250	5	340	40	192	312	180	41	3540
FROAV800E	8"	200	6	279	34	154	255	152	38	2130
FROAV200E	2"	50	10	105	18	32	86	37	29	260
FROAV600E	6"	150	6	222	26	105	197	100	40	1120
FROAV500E	5"	125	10	197	23	92	173	94	35	760
FROAV400E	4"	100	10	175	23	70	146	77	31	560
FROAV300E	3"	80	10	137	20	54	119	61	32	400
FROAV212E	2"1/2	65	10	124	20	40	105	50	31	330
FROAV114E	1 1/4"	32	10	74	15	18	59	22	25	140

## FKM

Reference	d	DN	PN	product.detail.attribute.De ANSI150	Z	Di	A	B	C	g
FROAV112F	1"1/2	40	10	83	16	22	72	25	28	160



# FROAV – Clapet valve DN 32:400

Reference	d	DN	PN	product.detail.attribute.De ANSI150	Z	Di	A	B	C	g
FROAV114F	1 1/4"	32	10	74	15	18	59	22	25	140
FROAV200F	2"	50	10	105	18	32	86	37	29	260
FROAV212F	2 1/2"	65	10	124	20	40	105	50	31	330
FROAV300F	3"	80	10	137	20	54	119	61	32	400
FROAV400F	4"	100	10	175	23	70	146	77	31	560
FROAV500F	5"	125	10	197	23	92	173	94	35	760
FROAV600F	6"	150	6	222	26	105	197	100	40	1120
FROAV800F	8"	200	6	279	34	154	255	152	38	2130
FROAV810F	10"	250	5	340	40	192	312	180	41	3540
FROAV812F	12"	300	5	410	45	227	363	215	41	5350
FROAV814F	14"	350	5	451	49	266	416	245	44	7855
FROAV816F	16"	400	5	514	65	310	467	285	50	12975



## FROAV – Clapet valve DN 32:400

- Installed with FIP QPV (d40 – d160) stubs and QRV stubs using flat gasket QHV/Y (d225 – d315), on PVC piping class PN10 or lower with type ODV flanges
- **Metal support for easy and precise centring** of the valve during installation
- Can be installed in either a vertical or horizontal position
- **Sealing system with O-ring** for optimum sealing and installation without flat gaskets