


RBM PN6 SDR 17,6 - S 8,3 - Riduzione

Riduzione concentrica codolo corto per saldatura di testa PN6 SDR 17,6 - S 8,3.

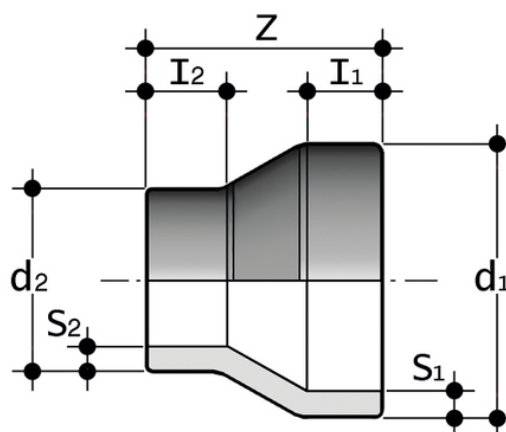

Codice	d ₁	d ₂	h ₁	h ₂	Z	S ₁	S ₂	g
RBM17050032	50	32	12	12	55	2,9	2,0	17
RBM17050040	50	40	12	12	55	2,9	2,3	20
RBM17063032	63	32	16	12	65	3,6	2,0	32
RBM17063040	63	40	16	12	65	3,6	2,3	36
RBM17063050	63	50	16	12	65	3,6	2,9	38
RBM17075050	75	50	19	12	71	4,3	2,9	54
RBM17075063	75	63	19	16	71	4,3	3,6	60
RBM17090063	90	63	22	16	80	5,1	3,6	82
RBM17090075	*90	75	31	26	91	5,1	4,3	120
RBM17110063	*110	63	40	36	105	6,3	3,6	170
RBM17110075	*110	75	40	28	96	6,3	4,3	170
RBM17110090	*110	90	42	42	100	6,3	5,1	190
RBM17160110	*160	110	40	34	129	9,1	6,3	500
RBM17180090	*180	90	53	42	145	10,2	5,1	600
RBM17200160	*200	160	62	52	145	11,4	9,1	900
RBM17225160	*225	160	65	53	162	12,8	9,1	1150
RBM17280200	*280	200	85	70	200	15,9	11,4	2340
RBM17280225	*280	225	70	55	200	15,9	12,8	2370
RBM17315225	*315	225	84	60	238	17,9	12,8	3400
RBM17315250	*315	250	95	95	230	17,9	14,2	3450

RBM PN6 SDR 17,6 - S 8,3 - Riduzione

Codice	d ₁	d ₂	h ₁	h ₂	Z	S ₁	S ₂	g
RBM17315280	*315	280	95	107	230	17,9	15,9	3500
RBM17355200	*355	200	57	40	160	20,1	11,4	3800
RBM17355225	*355	225	62	40	145	20,1	12,7	3600
RBM17355250	*355	250	54	40	130	20,1	14,2	3000
RBM17355280	*355	280	52	40	120	20,1	15,9	2800
RBM17355315	*355	315	43	40	100	20,1	17,9	2200
RBM17400225	*400	225	74	40	170	22,7	12,7	5700
RBM17400250	*400	250	66	40	155	22,7	14,2	4900
RBM17400280	*400	280	59	40	140	22,7	15,9	4300
RBM17400315	*400	315	55	40	125	22,7	17,9	3700
RBM17400355	*400	355	46	40	105	22,7	20,1	3000
RBM17450280	*450	280	70	40	165	25,5	15,9	6700
RBM17450315	*450	315	65	40	150	25,5	17,9	6000
RBM17450355	*450	355	57	40	130	25,5	20,1	4900
RBM17450400	*450	400	45	40	105	25,5	22,7	3700
RBM17500315	*500	315	75	40	175	28,4	17,9	9000
RBM17500355	*500	355	67	40	155	28,4	20,1	7600
RBM17500400	*500	400	60	40	135	28,4	22,7	6400
RBM17500450	*500	450	50	40	110	28,4	25,5	4900
RBM17560400	*560	400	73	40	165	31,7	22,7	10400
RBM17560450	*560	450	62	40	140	31,7	25,5	8300
RBM17560500	*560	500	52	40	115	31,7	28,4	6500
RBM17630400	*630	400	87	40	200	35,7	22,7	16900
RBM17630450	*630	450	77	40	175	35,7	25,5	14100
RBM17630500	*630	500	67	40	150	35,7	28,4	11500
RBM17630560	*630	560	54	40	120	35,7	31,7	8600
RBM17710500	*710	500	88	40	195	40,2	25,5	8900
RBM17710560	*710	560	76	40	165	40,2	28,4	16600
RBM17710630	*710	630	61	40	130	40,2	35,7	12200
RBM17800560	*800	560	95	40	210	45,3	31,7	28700
RBM17800630	*800	630	80	40	175	45,3	35,7	22500
RBM17800710	*800	710	63	40	135	45,3	40,2	16100